

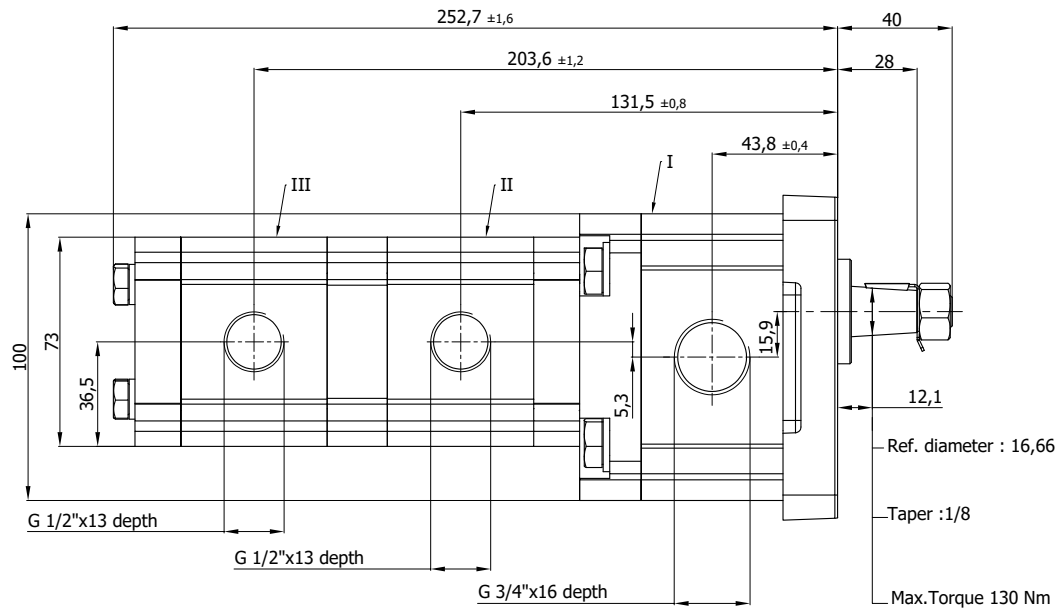



CIRCUIT DIAGRAM

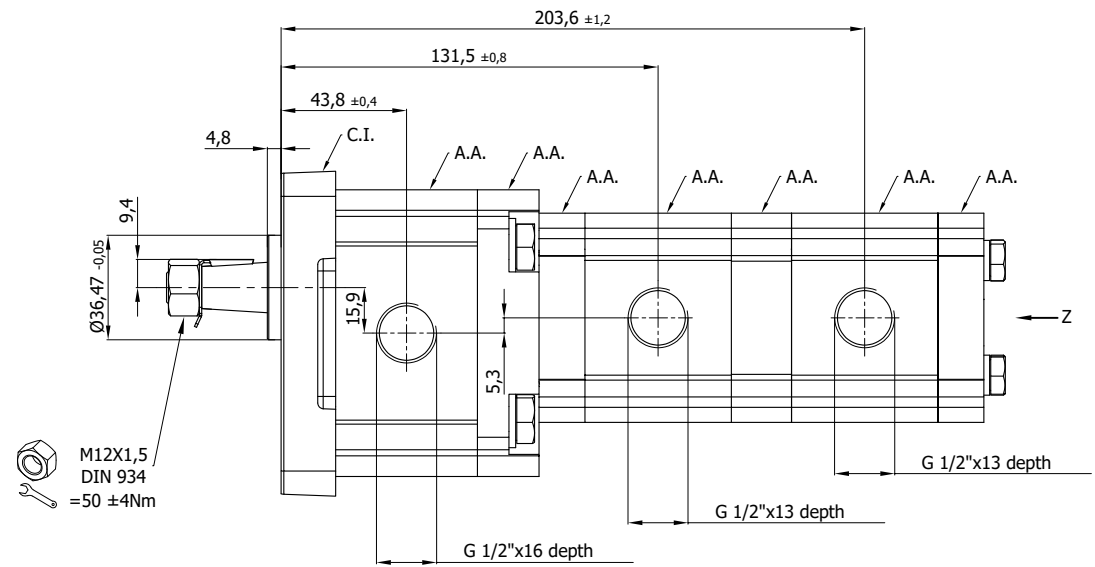


INLET PORTS

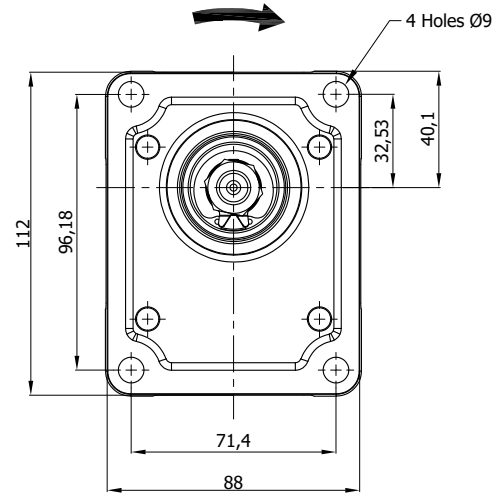

OUTLET PORTS

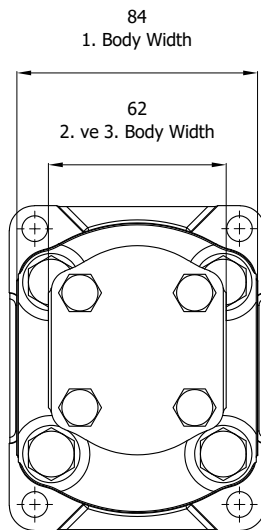

View Z



Woodruff Key

Material	
A.A.	Aluminium Alloy
C.I.	Cast Iron

Pump Data					
E	Pump Code		6073631000012		
	Pump Type		AP20.060/AP10.043/043.CAB705SN-T		
	Pump Sections		I	II	III
	Rotation		Clockwise		
	Displacement (cm³/rev)		5,9	4,3	4,3
F	Continuous Pressure (bar)	P1	250	220	220
	Intermittent Pressure (bar)	P2	280	240	240
	Peak Pressure (bar)	P3	300	250	250
	Max. Suction Pressure (bar)		0,25		
	Speed (rpm)	min.	650		
max.		3500			
G	Seals Type		NBR		
	Min. Temperature (°C)	Continuous	-20°		
		Intermittent	-40°		
	Max. Temperature (°C)	Continuous	+80°		
		Intermittent	+100°		
H	Contamination Class		20/18/15 ISO 4406		
	Test Specification		R1037		
	Oil		Mineral Oil Based Hydraulics Fluids According to ISO/DIN DIN 51524-2/DIN 51524-3		
	Viscosity		20/120 cSt		
	Start-up Viscosity		1500 cSt		